

3.0A Single-Phase GLass Passivated Bridge Rectifiers

Recifier Reverse Voltage 50V to 1000V

GBP

Features

- Glass passivated junction
- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- Suge overload ratings to 80 amperes peak
- Ideal for printed circuit board application
- High temperature soldering guaranteed 265°C/10

Mechanical Data


Case:Molded plastic

Terminals:Platde leads solderable per MIL-STD-750,
Method 2026

Polarity:Polarity symbols molded or Marked on body

Mounting Position:Any

Weight:0.05ounce,1.42 grams(approx)

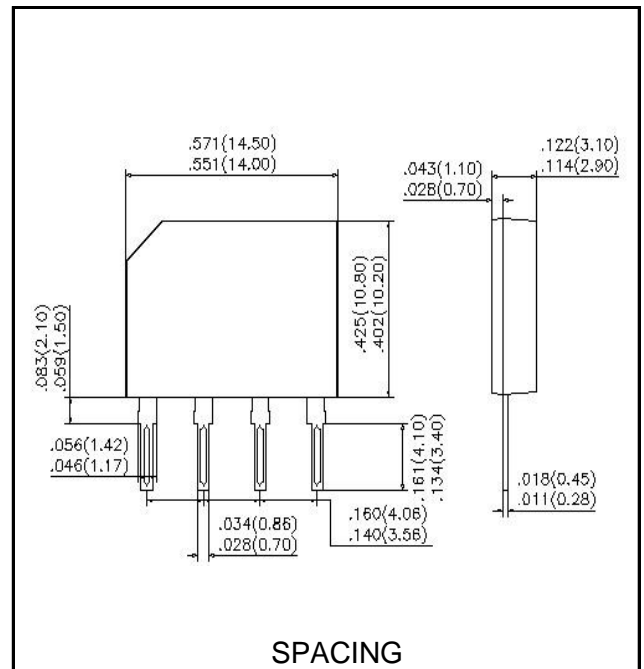

Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified,Resistive or inductive load,60HZ.

For Capacitive load derate current by 20%

Parameter	Symbol	KBP 3005	KBP 301	KBP 302	KBP 304	KBP 306	KBP 308	KBP 310	unit
		KBP 301	KBP 302	KBP 303	KBP 304	KBP 305	KBP 306	KBP 307	
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at TA=40°C	IF(AV)	3.0							A
Maximum instantaneous forward voltage drop per leg at 3.0A	VF	1.1							V
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	IFSM	80							A
Maximum DC reverse current at ratde TA=25°C DC blocking voltage per element TA=125°C	IR	5 500							UA
Operating temperature range	TJ,	-55to+150							°C
Storage temperature range	TSTG	-55to+150							°C

CASE

Rating and Characteristic Curves (TA=25°C Unless otherwise noted)

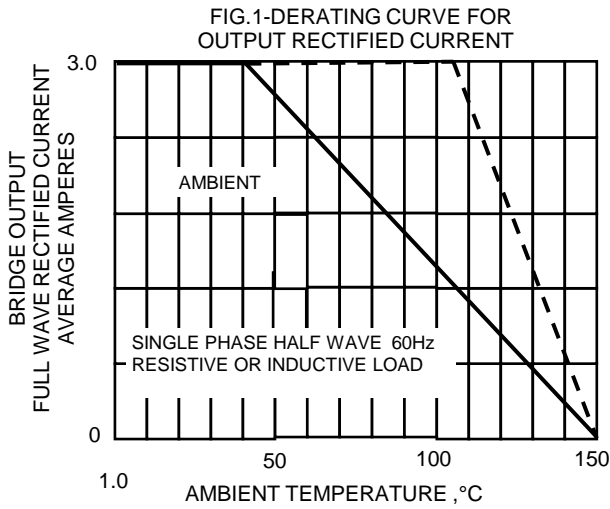


FIG.2-MAXIMUM NON-REPETITIVE SURGE CURRENT

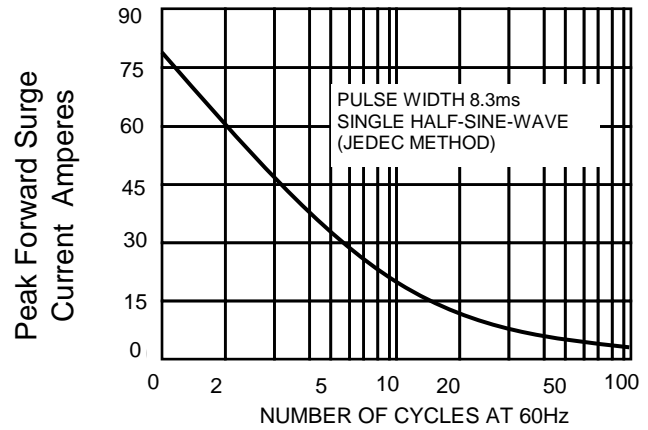


FIG.3-TYPICAL REVERSE CHARACTERISTICS

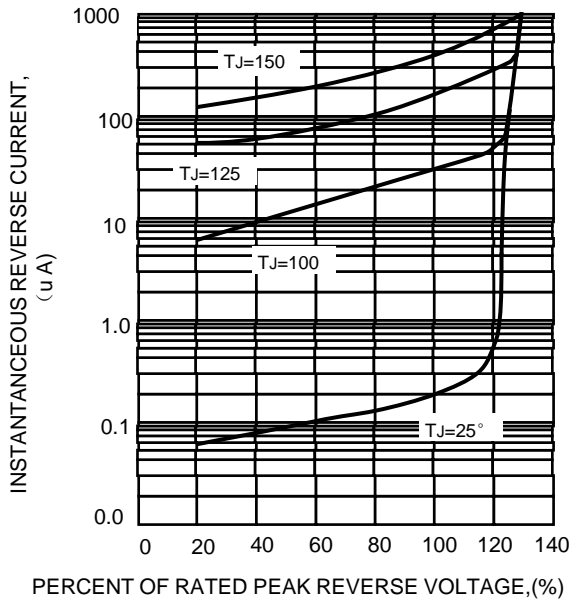


FIG.4-TYPICAL FORWARD CHARACTERISTICS

